

Hydro Station

Pure Water Cleaning System

NEW!



IPC Eagle

The Hydro Station is a compact and portable Pure Water Cleaning System. The Hydro Station has the unique ability to produce a high volume of pure water for multiple remote applications. The possibilities are endless and the system can be upgraded at any time to fit the application. This includes a 4 stage filtration system which includes reverse osmosis, and deionization process to produce mineral free water providing for incredible cleaning action and spot free windows.



Product applications for this system include the following:

- Window Cleaning
- Solar Panels
- House & Wall Washing
- Mobile Car Washing
- Pressure Washing
- Soft Wash Roof Cleaning
- More!

Great for the following industries:

- School Districts
- Universities
- Municipalities
- Contractors
- Landscapers
- Window Cleaners
- Facility Maintenance
- Car/RV/ATV/Motorcycle/Boat Dealerships
- Police Stations
- Property Management



Technical Data

Dimensions	51"W x 23" D x 26.5 H
Weight	250 Lbs.
Engine	Honda GX160, 5.5 hp pump

Pressure Washer


Flow	4 gpm
Pressure	1500 psi
Max temp	160 degrees F
Feed	Pressure or Suction

RO System Specs

Pure Water Prod. Rate	1.25 - 3 gpm (depending on supply water temp)
Pure Water Pressure	60 psi (average working pressure at hose reel inlet)
Rejection Rate	99%
Recovery Rate	50-70%
Operating Pressure	200 psi
Pre-Filter Service	@ 20,000 gallons



Single Unit Assembly for Ease of Use*

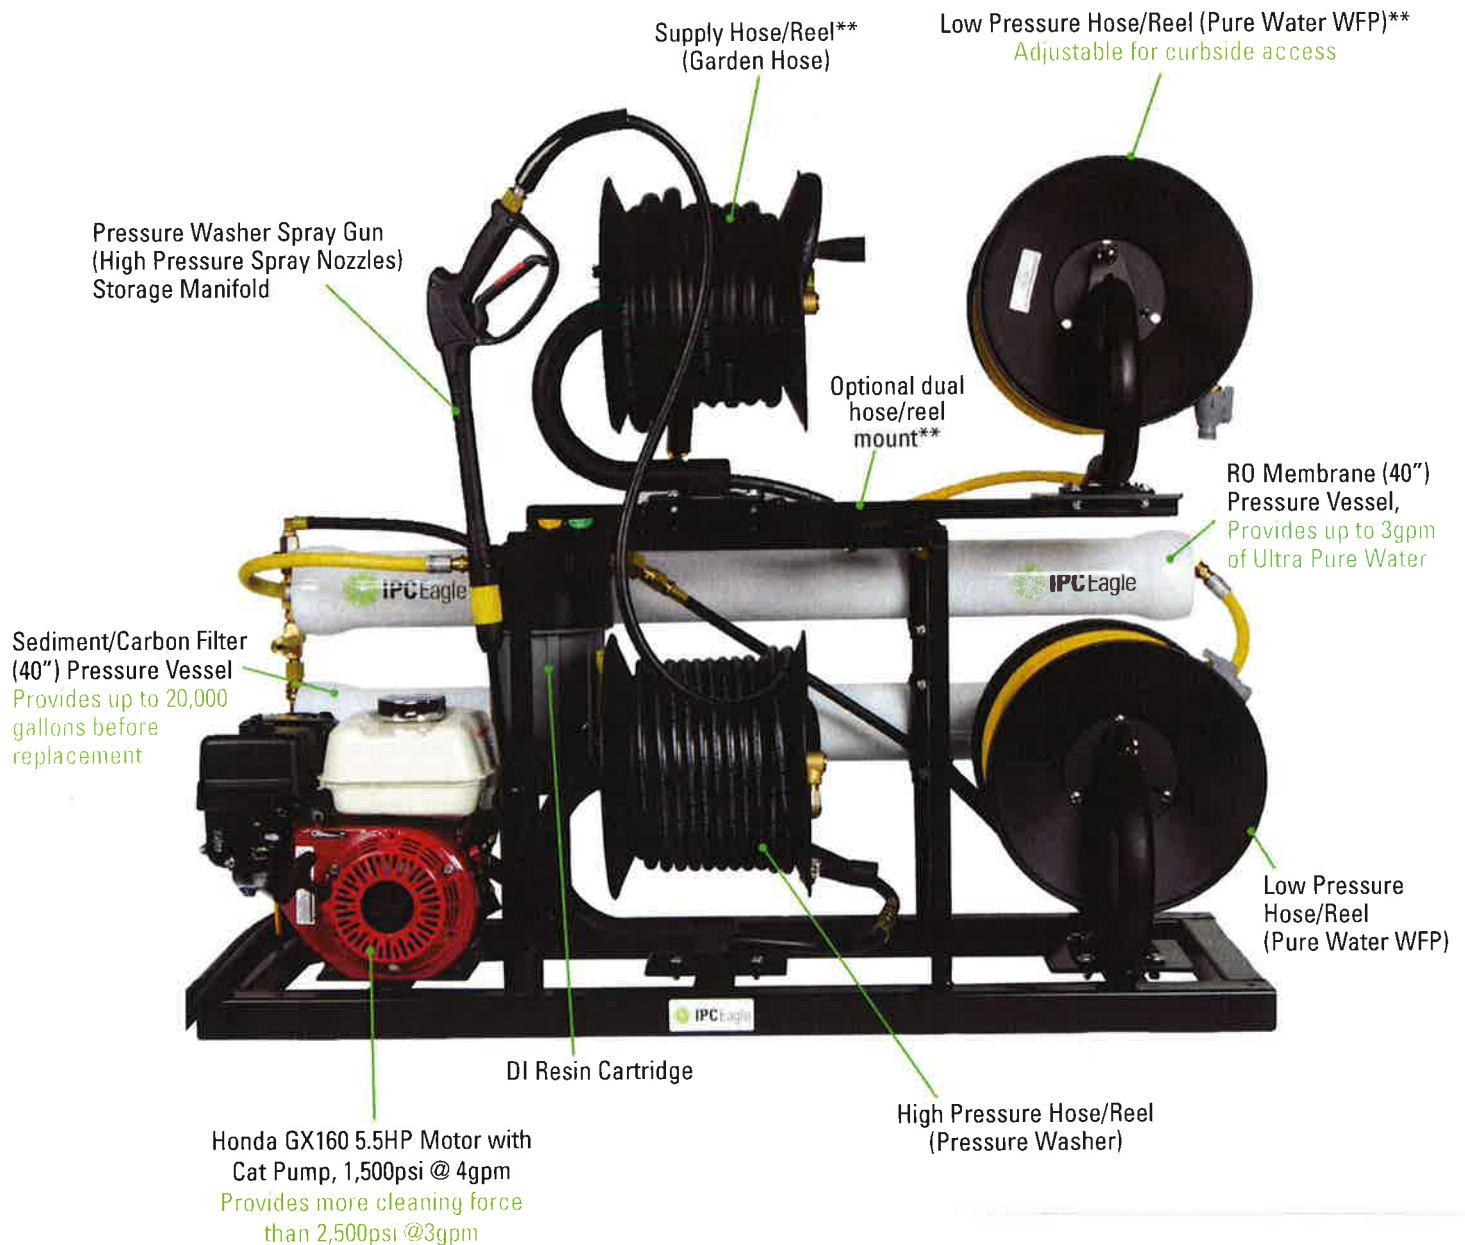

* Comes standard with 1 High Pressure Hose/Reel and 1 Low Pressure Hose/Reel

** Shown with optional dual hose reel mount on top of unit

Hydro Station can be mounted in an open or enclosed trailer.
(Tank and trailer not included)




IPC Eagle

2955 Lone Oak Drive • Eagan, MN 55121
651.686.5399 • Fax 651.686.5695 • 800.486.2775
www.ipceagle.com

IPC Eagle Corporation Sales and Service Provided By:



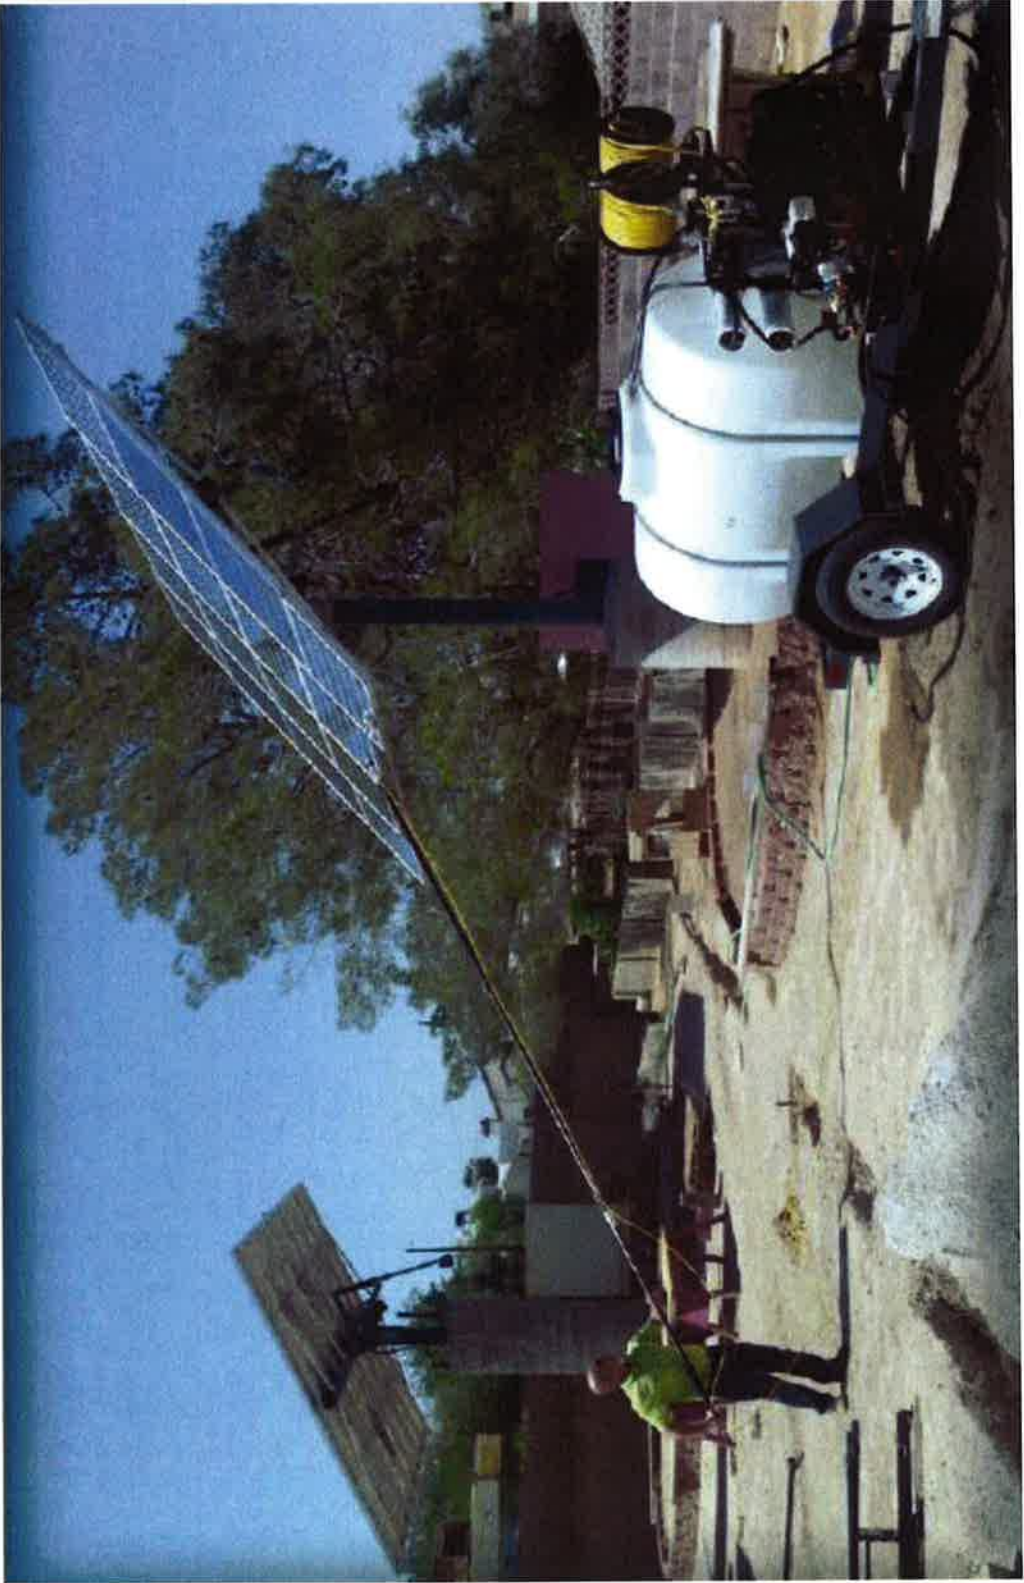

Low Pressure Hose/Reel (Pure Water WFP)**

Adjustable for curbside access

Supply Hose/Reel**
(Garden Hose)

Pressure Washer Spray Gun
(High Pressure Spray Nozzles)
Storage Manifold

Engine to be enclosed in
sound attenuation cabinet.

Optional dual
hose/reel
mount**

RO Membrane (40")
Pressure Vessel,
Provides up to 3gpm
of Ultra Pure Water

Sediment/Carbon Filter
(40") Pressure Vessel
Provides up to 20,000
gallons before
replacement

Low Pressure
Hose/Reel
(Pure Water WFP)

DI Resin Cartridge

High Pressure Hose/Reel
(Pressure Washer)

Honda GX160 5.5HP Motor with
Cat Pump, 1,500psi @ 4gpm
Provides more cleaning force
than 2,500psi @ 3gpm

